




EM 110, EM 115



The EM 110 and EM 115 are highly productive cutting machines. These machines are best suited for high volume manufacturing of 2" hoses along with workshop capability for 3" high pressure hose and 4" industrial hose.

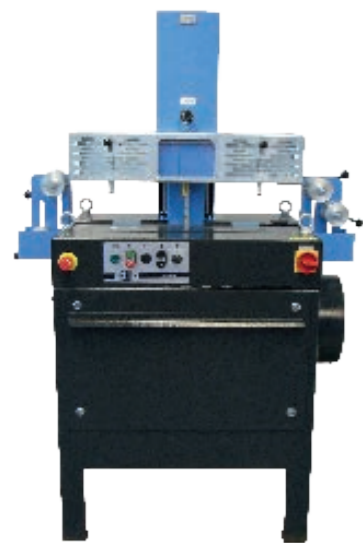

EM 110



EM 115

Unique drive motor with double bearings and oversized shafts

Reduce scrap with straight cuts

More cuts between sharpening increases profits

Less contamination in the shop and in the end product will result in more parts out the door and a better environment in the building

Maximizes motor life, giving you the lowest cost of ownership in the market

Cut faster and generate a more saleable product

Quality steel blade

Long lasting German quality steel blades, lowering the cost of ownership

Compact design

Ideal for a mobile service

CE compliant

Brake motor for safety

Technical Data	EM 110	EM 115
Production SAE R 13/ SAE R 15	3"	2"
Workshop SAE R 13/ SAE R 15	3"	3"
SAE R 12	2"	2"
Industry	4"	3"
Max. outside (mm)	Ø 125	Ø 125
Noise level (dBA)	80	80
Brake motor	ja	ja
Suction connection (mm)	Ø 100	Ø 108
Drive (kW)	7,5	7,8
Cutting blade (mm)	TM G 520x4x120	TM G 520x4x40
L x W x H (mm)	800 x 780 x 1700	1210 x 650 x 1650
Weight (kg)	280	245

Accessories

- Hose coiling reel UWT 2
- UMS 4 Hose measuring tool
- UHG 14 Hose guide 2000 mm
- UVC
- USH4 Package
- 514.1 Foot for UMS 4 (840mm)
- UH4 ext. Extension 1000 mm



Lateral guide rolls for guiding and positioning of the hose, for a better cutting quality.



Various bending points selectable for straighter cuts and relief of pinch on the blade.



Exchangeable holding guide (two sizes) for optimum positioning of different hose sizes.



Guide for a perfect centration of hoses.



UHG 14 Hose guide



Hose coiling reel UWT 2 +
Hose measuring tool UMS 4

Accessories and more information can be found on the this catalogue's jacket.