

PR 10, PR PB



The use of gas hoses (e.g. compressed air, nitrate, etc.) requires perforating the outer layer. With low effort, the PR 10 makes perforating the outer layer of hoses easy.
The established UNIFLEX quality gives you a precisely tool to work with hoses up to an outer diameter of 45 mm.



PR 10

Perforating with standards
Constant and quick adjustments of the prick depth directly on the machine
Closable needles
Pricking from 4 sides simultaneously
No injury to the pressure holder
Patent solution vs. costs
No investments for additional machines
No maintenance
Saves time due to reproducible adjustments of the prick depths
Easy handling
Compact construction and tried-and-tested technique
Even from 8 mm ext.Ø perforating is possible
Saves space
User-friendly
Easy adjustment of hose dimensions
2, 3 or 4 wheels can perforate, depending on what is needed
Perforating wheels are adjustable in height
Saves money
No course of instruction needed




PB PR 266 P



PR PB 232 F



PR PB 237 G

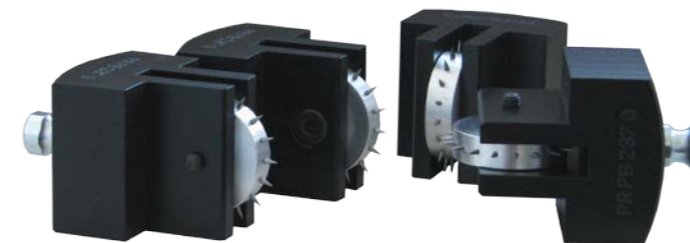

Delivery in a set of 4 pieces


Technical Data	PR 10
Working range	Ø 8 - 45 mm
L x W x H (mm)	290 x 150 x 330
Weight (kg)	approx. 8
First Class Advantages	
Universal	



Constant prick depth



Side view



With perforating dies

Double Prick Wheels

- Straight perforation
- No twisting of hoses

Adjustments

- Perfect hose guidance and centration
- Optimal adjustment of hose dimensions

Compact construction

- With minimum space requirements
- Mobile usage possible

Perforating dies

- PR PB-232 F in profile 232 F
- PR PB-237 G in profile
- PR PB-266 P in profile 266 P

Accessories and more information can be found on the this catalogue's jacket.